

TEHNIČKI LIST


# KROVNI TRAPEZNI POKROV S POJAČANJEM

## TR 18A+ SQ (sound – aqua)


TR-18A+ SQ



SQ = FILC PROTIV KONDENZACIJE I BUKE debljina 3–4 mm  
 info: SQ (sound-zvuk, aqua-voda)

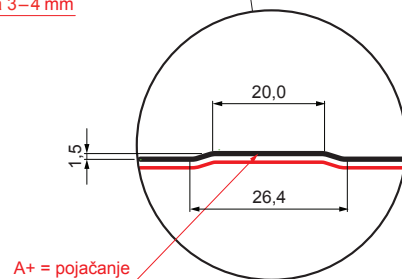

A+ = pojačanje

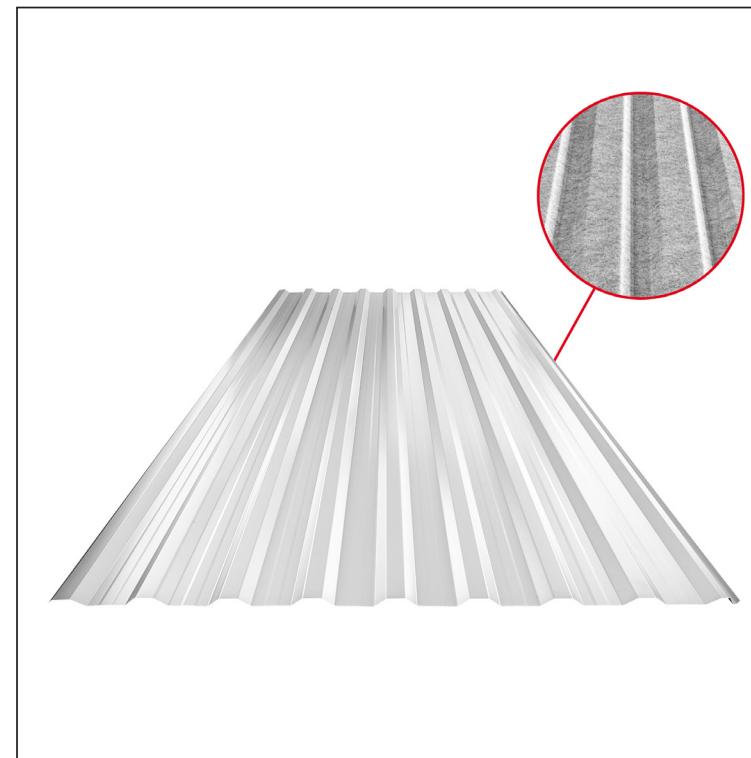

**AZ** Aluzink – Natur

Tehnički parametri [mm]	
Pokrovna širina	1100,0
Ukupna širina	1138,0
Visina profila	18,0
Debljina lima	0,50
Duljina pokrova	maks. 8000,0

INDEX	ZMENA	DATUM	PODPIS	<b>KJG</b> QUALITY®	TR18	Scan code for 3D model	
ZN. MAT.			T.O.	HMOTNOST kg		MER.	
ROZM.-POLOT				STN		TR.Č.	
VYPR. Ing. Kluska M.				POZN.		Č.POZICIJE	
PRESK.				STARÝ V.		Č.V.	
TECHNOL.		TECHNOL.		STARY V.		Č.V.	
NÁZOV				Počet listov		List	
Krovni trapezni pokrov s pojačanjem TR 18A+ SQ (sound – aqua)				TR-18A+ SQ			

Izrađeno: 06.06.2026 11:30:42

Technické zmeny vyhradené